



## BenQ DLP Projector MW560

### Feature High Light

- Dual HDMI inputs for multiplatform digital connectivity
- 4000 ANSI Lumen High Brightness for Stunning Presentations
- 20,000:1 High Native Contrast for Crisp Readability
- 1.1x Zoom Ratio for High Setup Flexibility
- Simple Setup, Intuitive Operation, and Hassle-Free Maintenance
- Eco-Friendly Low Total Cost of Ownership
- BenQ Exclusive Picture Mode For Spreadsheet Contents



### Display

Projection System	DLP Single
DMD Type	0.65" WXGA
Native Resolution	1280 x 800 pixels
Brightness	4000 ANSI Lumens
Contrast Ratio*	20,000 : 1
Display Color	30 Bits/1.07 Billion Colors
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)
Light Source	Lamp
Light Source life*	Normal 6000 hr Economic 10000 hr SmartEco 10000 hr LampSave 15000hr

### Optical

Throw Ratio	1.55-1.7 (87" ±3% @ 2.9m)
Zoom Ratio	1.1x
Lens shift	NA
Keystone Correction	Auto ID, Vertical +/- 40 degrees
Projection Offset	100%±2.5%
Projection Size	60"~150"

### Audio

Built-in Speaker	10Wx1
------------------	-------

### Special Feature

Security Feature	Security Bar, Kensington lock 1D Auto Keystone, High Brightness, Spreadsheet mode, Bright Mode, Presentation Mode, Infographic Mode, Video Mode, Srgb Mode
------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------

### Compatibility

Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)
Horizontal Frequency	15K~102KHz
Vertical Scan Rate	23 ~ 120 Hz
HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM, SDTV (480i/576i), EDTV (480p/576p, HDTV (720p, 1080i/p 60Hz)

### Power

Power Consumptions(Max/Normal/Eco)	Max 280W, Normal 260W, Eco 215W
Standby Power consumption	Normal < 0.5Watts.
Power Supply	100 ~ 240V AC

### Dimension and Weight

Product Dimensions (WxHxD)	296 x 120 x 221 mm
Product Weight	2.3kg +/- 200g

### Operation Condition

Noise Level(Normal/Eco)	34 /29 dBA
Operating Temperature*	0 ~ 40°C

### Accessories

Accessories (Standard)	QSG(4J.JND01.001) Remote Control (5J.JND06.001) AAA Batteryx2 VGA cable (1.5m) Power Cord (1.8m) Warranty card (by Region)
Accessories (Optional)	Spare Lamp Kit (5J.JND05.001) 3D Glasses (5J.JH25.002) Ceiling mount Coast Mirror(5A.JH328.10X) WDC10 WDC20

### OSD

On Screen Display Language	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese/ Farsi / Vietnamese/ (30 Languages)
----------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### Environment Notice

\* The Contrast is measure by Full On Full Off standard.

\*LightSource life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.




Connectivity

	Qty
1 HDMI-1	1
2 HDMI-2	1
3 USB TypeA (1.5A power)	1
4 USB Type min B (For FW upgrade)	1
5 Computer In (D-sub 15pin, Female)	1
6 Monitor out (D-sub 15pin, Female)	1
7 RS232 In (D-sub 9pin, male)	1
8 LAN (RJ45) (Control & FW Upgrade)	NA
9 DC 12V Trigger (3.5mm Jack)	NA
10 Composite Video (RCA)	1
11 S-Video	1
12 Audio in (mini jack)	1
13 Audio out (mini jack)	1
14 Audio LR in (RCA)	NA
15 Microphone in (Mini jack)	NA
16 IR Receiver (Front+Top)	2
17 Kensington anti-theft lock slot	1

Installation

Ceiling/Wall mount installation diagram

Ceiling/Wall mount screw: M4  
(Max L = 25 mm; Min L = 20 mm)

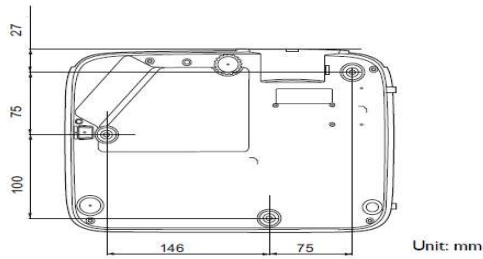

Dimension

Dimensions

296 mm (W) x 120 mm (H) x 221 mm (D)

