



**Model Name: PL5501**

**Unique selling points**

**Trade mark**


- \*Ultimate narrow bezel to bezel 3.5mm
- \*Multiple input sources for 4K daisy chain display
- \*X-Sign 2.0 for interactive large display experience
- \*Exclusive All-In-One SW for color calibration and video wall setting
- \*PID Panel supports 24/7 landscape and portrait
- \*Brightness 500 nits
- \*Support RS232/LAN command control



<b>Panel</b>	Screen Size (inch)	55"
	Backlight	Direct LED
	Active Area (horizontal × vertical)(mm)	1209.6 X 680.4 mm
	Resolution (pixels)	1920 x 1080
	Brightness (typical)	500 nits
	Contrast Ratio (typical)	1,200 : 1
	Light Life (typical)	50,000hrs
<b>Audio</b>	Display Orientation	Landscape/Portrait
	Internal Speaker (Amp)	8W x 2
<b>Connectivity</b>	PC Audio In/ Line Out	x1 / x1
	VGA In/Out	x1 / No
	DVI In/Out	x1 / x1
	DP In/Out	x1 (1.2) / No
	USB port (Type A)	x1 (2.0)
<b>Control</b>	HDMI In/Out	x2 (1.4 x 1, 2.0 x 1) / No
	RJ45 Port (LAN command)	x1
<b>Power</b>	RS232 In/Out	x1 / x1
	AC/DC In	AC
	Voltage	100 ~ 240Vac, 50Hz / 60Hz
<b>Mechanical</b>	Power Consumption (max/standby )	210W / <0.5W
	Dimension (WxHxD) (mm)	1213.5 x 684.3 x 122.9 mm
	Bezel Width (top/bottom/left/right) (mm)	2.3/1.2/2.3/1.2 mm
	Weight (w/o Packing/ w/ Packing) (kg)	28.1 / 39.0 kg
<b>Environment</b>	Wall Mounting (VESA) (mm)	600x400mm, 4-M6*40L
	Operation Temperature	0°C ~ 40°C
	Storage Temperature	-20°C ~ 60°C
<b>OSD</b>	Usage (Hour/Day)	24/7
	On-Screen Display Languages	EN/EF/SP/CN/EP/GM/RS/IT (8 Languages)
<b>Software</b>	Multiple Display Control (MDA)	Yes
	Color Calibration SW	Yes
	X-Sign 2.0	Yes
<b>Accessory</b>	Remote Control	Yes
	Power Cord(by region)	Yes
	VGA / HDMI / DVI / DP / USB(for touch)	NA / x1 / x1 / x1 / NA
	RS232 Cable	x2 ( RJ45 to RS232 + RS232 to USB)
	Quick Start Guide	Yes
	User's Manual Electronic File	Yes

# PL5501

## Dimension (mm)

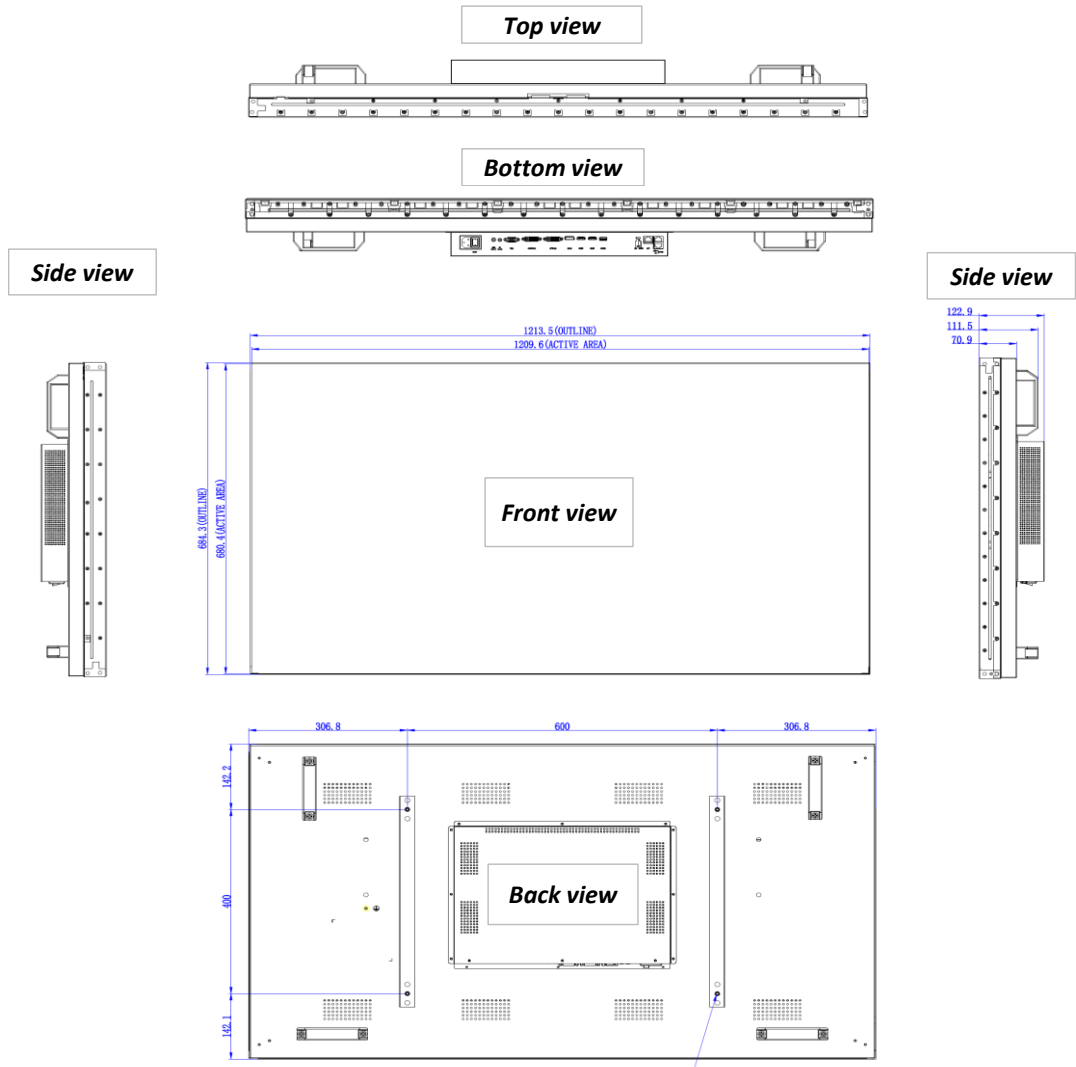

NOTE : UNIT:mm  
1. BEZEL WIDTH(T/B/L/R) : 2.3/1.2/2.3/1.2  
2. WALL MOUNT SCREW THREAD DEPTH : 4-M6\*40L

