

Features

EZWrite 5 Collaboration Tool

Cloud features allow for cross-platform, device and board-to-board connection so anyone from your team can join in. All annotations made can be saved and reopened at a later time from the cloud. The Floating Toolbar allows quick access to frequently used tools such as Whiteboard, Annotation Tools and Video Recording.

InstaShare Wireless Collaboration Solution

Integrated InstaShare app enables easy wireless presentation and collaboration by screen mirroring. Launching the host app and downloading the client app onto an Android, iOS, Mac or Windows device, up to 16 participants can instantly stream content like presentations and full HD videos smoothly. InstaShare can have splitscreen for up to 4 participants.

Account Management System (AMS)

AMS allows users to directly manage their personal settings or cloud storage space and can be easily and securely accessed using NFC technology.

The smart design of RP6501K incorporates a highly customized user interface with easy to access design for BenQ Launcher, screen functions and the BenQ keyboard. It comes with the new remote with built-in software pointer and spotlight. It also features a front pen tray, front IO panel and chamber speakers.

Healthier Environment

RP6501K provides Smart Eye-Care technology with Flicker-Free performance, Low Blue Light emission and an Anti-Glare screen preventing eyestrain and fatigue. The Germ-Resistant Screen is empowered by a multilayer coating of the non-toxic, enduring nano ionic silver agent that kills most germs accumulating on screen surfaces. The Air-Quality sensor helps to monitor CO2 concentration level in the meeting room helping the host to keep it at an ideal level.

Device Management Solution (DMS)

Device Management Solution is a platform enable ITS remotely manage BenQ screens, the manager can check H/W status, change settings, manage F/W upgrades and APP installation/uninstallation, all remotely as long as BenQ screens and the device manager uses are all connected to Internet, no need to be in front of the screen and tweak the screen one after one, with DMS Cloud all these tasks can be done with minimal efforts and maximal efficiency.

7 USB 2.0


IAN

Touch

DisplayPort

HDMI input

Input and Output Terminals

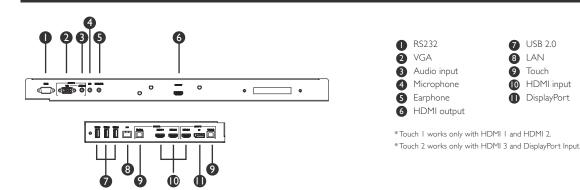

RP6501K

65" Interactive Flat Panel Corporate



Specifications

·			
Panel	Screen Size	65"	
	Resolution	3840 × 2160	
	Brightness (Typ.)	450 nits	
	Contrast Ratio (Typ.)	1200 : 1	
	Viewing Angle (H/V)	178 / 178	
	Response Time (G-t-G)	8 ms	
	Backlight Life (hrs)	30.000	
	Operating Hour	18 / 7	
	Orientation	Landscape	
Power	Туре	Internal	
	Power Supply	100 V~240 V, 50 Hz / 60 Hz	
	Power Consumption	Maximum (W / h)	186W
		Typical (W / h)	130W
		Standby Mode (W / h)	< 0.5W
		Off Mode (W / h)	0W
	AC Power Switch	Yes	
	Wake up	VGA / HDMI / DP	
Touch	Technology, Number of Touches	IR, 20 points	
	Interface	USB × 2	
Glass	Tempered Glass, Hardness	4mm, 7H	
	AG coating	AG80	
Caring	Eye-Care Solution	Smart Eye-Care	
	Germ-Resistant Screen	Yes	
Environment	Operation Temperature	0°C ~ 40°C	
	Operating Humidity	10% ~ 80% RH non-condensing	
Connectivity	Input	VGA	x l
		HDMI	HDMI 2.0 × 3
		Display Port	DP 1.2 x 1
		Audio Input	x I (3.5 mm)
	Output	HDMI	x l
	USB	USB 3.0 × 1 / USB 2.0 × 5	
	RS232	Yes	
	RJ45	Yes	
	Remote Controller	Yes	
Audio	Internal Speaker	16W x 2	
Mechanical	Dimension (mm)	Screen	1521.1 × 967.1 × 136.1
		Package	1660 × 1070 × 275
	Weight (kg)	Screen	50
		Package	62.5
	Bezel Width (mm)	31.6 (Top / Side), 98.0 (Bottom)	
	Wall Mounting (VESA) (Screw Type / Max. Length)	500 × 400 mm / M6 × 14 mm	
	OPS	Yes	
	NFC sensor Pen Tray	Yes Yes	

Dimensions

