




Driver-Free 4K UHD Wireless Conferencing System

InstaShow® VS25

VS25 enables instant plug-and-play wireless conferencing—no apps, drivers, or network setup required. Presenters—even guests—can access video conferencing cameras and audio to enable instant collaboration with a tap.

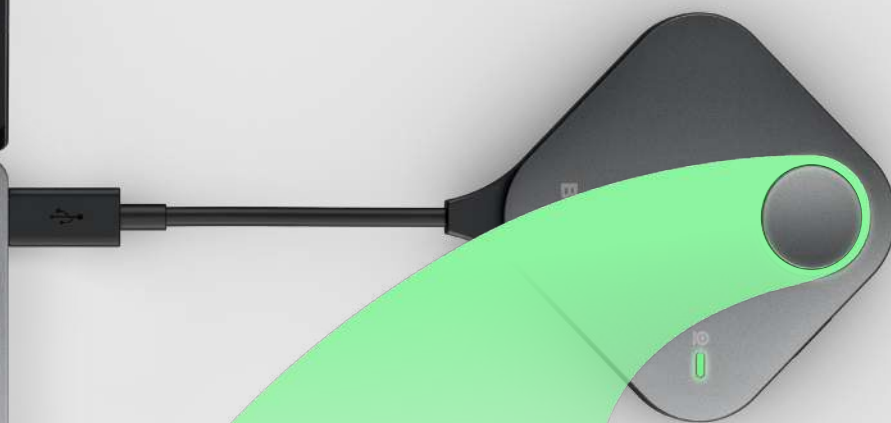

No Driver Needed

No drivers needed—just plug in and join online meeting instantly.

*Support Windows, macOS, Linux, or ChromeOS systems.



No App Download Required

No software or app required—just plug in and instantly share content during your meeting.





No Network Setup Required

No complex network setup or IT help needed. Receiver, Multimedia Hub and Button pair automatically—just plug and play to start presenting instantly.


BenQ

Dimensions & Connectivity

Host Button

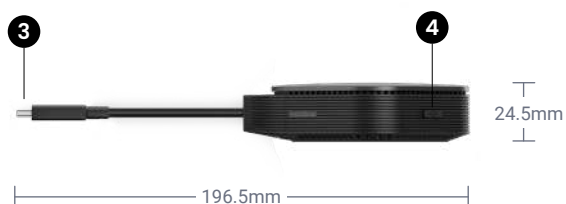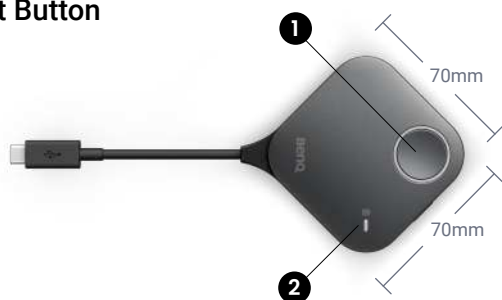

Button

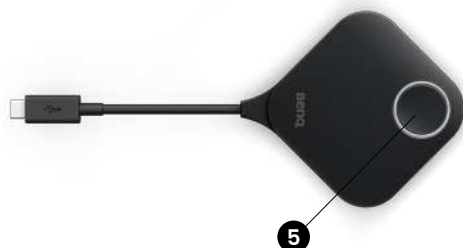

- 1. Present Key
- 2. Multimedia LED

- 3. USB-C Connector
- 4. Split Screen Key
- 5. Present Key

Receiver



Multimedia Hub



6. Standby On/Off

7. PAIRING Key

8. USB-A for Touchback

9. RJ45

10. Power Switch

11. HDMI Out

12. Kensington Lock


13. USB-C for Touchback / DP / PD-IN

14. Multimedia LED

15. Power Port

16. Reset

3 Steps for One-Time Wireless Presentation Setup

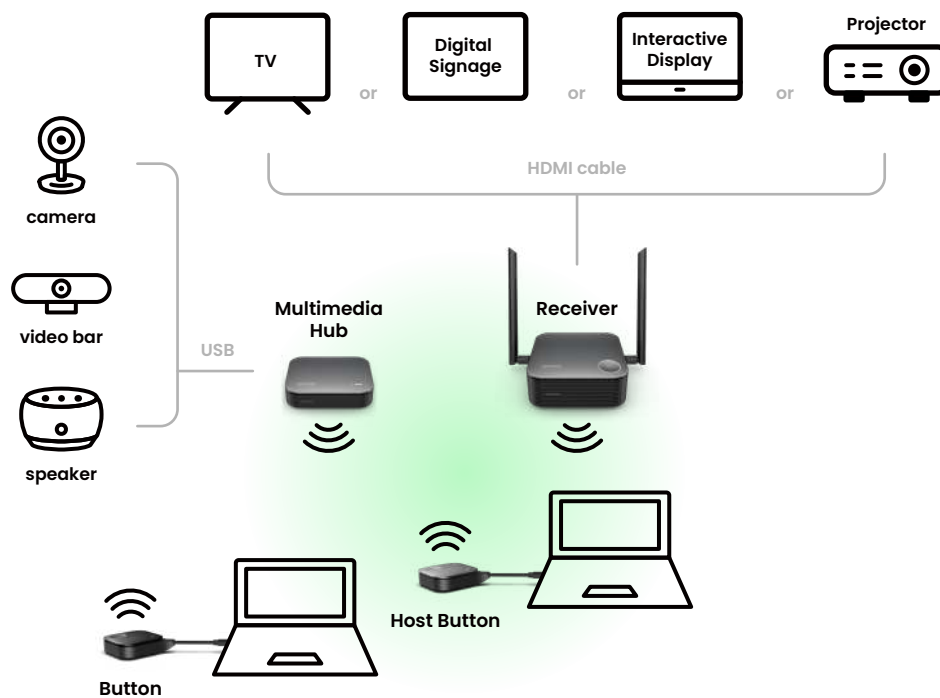

Set up once—no need to rebuild for every meeting.

Steps:

1. Connect display to Receiver via HDMI cable and connect video bar to Multimedia Hub via USB cable
2. Plug Host Button into presenter's laptop, tap the green button and share the content
3. Open video conferencing app on Presenter's laptop and select camera, microphone and speaker

*Plug Button into another presenter's laptop for seamless content switching

*Support Zoom, Microsoft Teams, or Google Meet applications.

Specifications

Features

HDMI Video Outputs	HDMI 2.x (with HDCP), Up to 4K 60Hz
USB-C Video Outputs	DP 1.2 (with HDCP), Up to 1080P 60Hz
BYOM	Driver-Free Video conference
BYOD	Apple OS/Android/Windows
TouchBack	V
WiFi Standard	6
Wireless Frequency	2.4G + 5G
Wireless Data Rate (Maximum)	AX3000 (2.4G + 5G 3,000 Mbps)
Simultaneous Connections	64
WiFi Protected Access	WPA3 Enterprise*
Advanced Encryption Standard	AES128
Transmission Distance	40m

* Enterprise Available in Q1 2026

Product Content

Receiver	(x1)
Button	(x1)
Host Button	(x1)
Multimedia Hub	(x1)
Cradle	(x1)
Power Adapter	(x2)
Antenna	(x2), 2dbi
HDMI Cable	(x1)
Button HDMI Cable	(x1)

Specifications

● Host Button

Connector Type	USB Type C (Default)*
Function Key	Split Screen Key

*Switchable between Type C and HDMI

● Button

Connector Type	USB Type C (Default)*
Function Key	Split Screen Key

*Switchable between Type C and HDMI

● Multimedia Hub

Power Supply	1.5A, DC 12V±10%
Normal Power Consumption	3.9W
USB-C Port	(x1)
USB-A Port	(x1)
Dimensions without Antenna	98 x 78 x 25.1 mm (w/o feet)
Weight	90g

● Receiver

Power Supply	3A, DC 12V±10%
Normal Power Consumption	15W
LAN (RJ45)	(x1)
HDMI Port	(x1)
USB-C Port	(x1)
Dimensions without Antenna	123 x 123 x 49.9 mm (w/o feet)
Weight	300 g

● Cradle

Weight (Net)	555g
Dimension (WxDxH)	84.5 x 128 x 62 mm (w/o feet)



Asia Pacific

BenQ Asia Pacific Corp.
16 Jihu Road, Neihu, Taipei
114, Taiwan
Tel: +886-2-2796-6888
Fax: +886-2-2796-9498

China

BenQ (Shanghai) Co., Ltd.
198 Zhangyang Road, New
District, Suzhou, China
Tel: 86-512-6807-8800
Fax: 86-512-6809-7900

North America

BenQ America Corp.
3200 Park Center Drive,
Suite 150, Costa Mesa,
CA 92626, U.S.A.
Tel: +1-949-255-9500
Fax: +1-714-557-9730

Europe

BenQ Europe B.V.
Meerenakkerweg 1-17,
5652 AR Eindhoven, The
Netherlands
Tel: (+31) 88-888-9200
Fax: (+31) 88-888-9299

Latin and Central America

BenQ Latin America Corp.
2020 NW 89 Place, Suite
201, Miami, FL 33172, U.S.A.
Tel: +1-305-468-1190
Fax: +1-305-468-1194